



Atomex X-50FF Fine Finish Airless Spray Tip

As low as
\$69.00

Product Images



Short Description

Atomex X-50FF Fine Finish reversible airless spray tips are made in the USA using the hardest tungsten carbide in the industry. Ideal for applying gloss water based paints onto doors, architraves, skirting boards and balustrades at lower pressure with much less overspray and high quality finish.


Description

Atomex X-50FF Fine Finish airless spray tips are made from the hardest tungsten carbide in the industry formulated to a Rockwell Hardness of 93 – a diamond’s hardness is 100. We guarantee the longest tip life and superior pattern in the industry.

Available sizes for the Atomex X-50FF Fine Finish Airless Spray Tip

Fan Width - Inches							
GPM	2-4	4-6	6-8	8-10	10-12	12-14	LPM
0.05	108	208	308	408			0.20
0.09	110	210	310	410	510		0.33
0.12	112	212	312	412	512	612	0.49
0.18	114	214	314	414	514	614	0.69
0.24					516	616	0.91
0.31					518	618	1.17
	5-10	10-15	15-20	20-25.5	25.5-30.5	30.5-35.5	
Fan Width - Centimeters							

Atomex X-50FF Fine Finish airless spray tips are designed with a pre-orifice at the back of the tip for initial atomization, the fluid then passes through the second main spray orifice for final atomization which produces a lower pressure and much finer atomization of the spray finish.

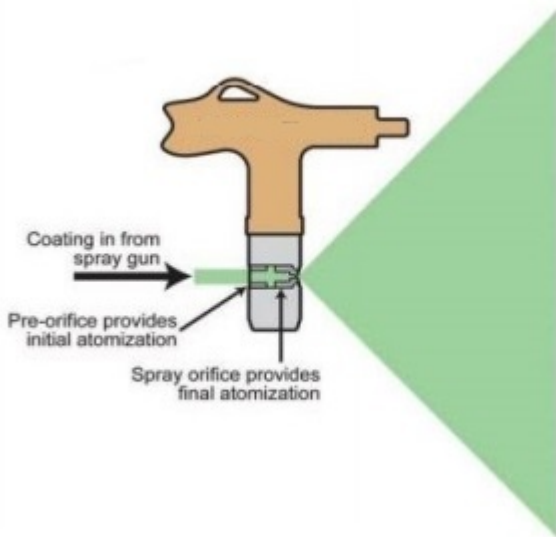

The finer atomization of the spray allows much lower application pressure. Traditional airless spray tips require approx 2000psi to produce the correct spray fan without leaving “tram line” or “tracks” at the top and bottom of the spray fan but the Atomex X-50CT will perform and give you a great spray finish at pressures as low as 1300psi (depending on the product applied)

Ideal for applying gloss water based paints onto doors, architraves, skirting boards and balustrades at lower pressure with much less overspray and high quality finish. These can also be used for industrial metal applications where a higher standard of paint finish is required.

As a general guide for fine finishing we have suggested some sizes of tips to be used for various applications

Water Based Enamel and Gloss

Application	Tips Size	Approx Spray Width
Doors - Internal/External	414	7"-8" (17cm-20cm) Approx
Door Jambs	312	5"-6" (12cm-15cm) Approx
Architraves	312	5"-6" (12cm-15cm) Approx
Skirting Boards	312	5"-6" (12cm-15cm) Approx

Flat and Low Sheen Acrylic

Application	Tips Size	Approx Spray Width
Ceilings	518	9"-10" (22cm-25cm) Approx
Walls	518	9"-10" (22cm-25cm) Approx
External Cladding	518	9"-10" (22cm-25cm) Approx

Quick Dry Industrial Enamel and 2K Poly

Application	Tips Size	Approx Spray Width
Flat Wide Metal Surfaces	414	7"-8" (18cm-20cm) Approx
Narrow Metal Surfaces	214	3"-4" (7.5cm-10cm) Approx

These tips can also be used with any electric, petrol and air driven airless sprayer for professional high quality paint spray finishes. In some cases you will need to adjust the tip size for the material being sprayed.

Seal alignment, the patented tip seal has a square opening that fits on the end of the tip handle. This unique feature allows you to easily insert the seal into the guard. Then simply twist the tip handle to line up the seal cavity accurately to receive the tip shaft. Quick accurate installation every time!



Atomex X-50FF Fine Finish Reversible Airless Spray Tip Features –

- 5000psi Pressure Rating
- Can be used at much lower pressure
- Interchangeable with most brands
- Mega-Hard Tungsten Carbide

- Patented tip seal design
- Solvent proof seal
- Australia's largest range of tips in stock
- Made in the USA



Additional Information

Brands

Atomex

Product Options

Atomex X50FF Fine Finish Airless Spray Tip:	108
	110
	112
	114
	208
	210
	212
	214
	308
	310
	312
	314
	408
	410
	412
	414
	510
	512
	514
	516
	518
	612
	614
	616
	618

